

8x8 Analog Video Only Router

Model 860-XL818A



- ◆ **8 x 8, Analog Video, **AUDIO OPTIONAL****
- ◆ **Local or Remote Control Panel**
- ◆ **AFV, breakaway, or X-Y Control**
- ◆ **Maximum of 256 Remote Panels**
- ◆ **RS-232 Serial Control, Standard**

The 800 Series Routing Switchers are wide bandwidth vertical interval switchers designed for professional video production facilities. The compact design of Link's routing switchers makes them an essential part of any facility.

Packaged in a 19" rack mountable chassis, the switchers are supplied with a single front-loaded power supply. An optional redundant power supply is available. High quality front panel push buttons are used for selection of inputs and outputs.

Remote control panels are interconnected with standard Ethernet 10Base2 single coax connections. RS-232 is provided through a standard D-sub connector. Panels can be set to control a single output bus or the entire matrix.

The Link 8 x 8 routing system features:

- Modular Design – plug-in modules for video & audio. No active components on the frame.
- Two power supply slots are accessible from the front panel. One power supply is standard.
- A redundant power supply is available as an option.
- Detachable X-Y front panel control with Ethernet 10Base2 coax connection.
- Analog video only models and models with audio follow video.
- Digital video only models and models with analog audio follow.
- Digital video only models and models with digital audio follow.
- RS-232 control standard.

Remote Mounting Kits for Control Panels

The supplied control panel for all switchers is shipped installed into the front of the main electronics chassis. The control panel can be removed from the electronics chassis in the field and installed into a remote mounting kit. The mounting kit hardware includes rack-mounting hardware for the control panel, a blank panel(s) that is installed onto the front of the electronics chassis, and a power supply. Order the appropriate rack mounting kit from the list below:

860-XL818A
860-XL818C

8 x 8 Analog Video Only Routing Switcher
8 x 8 Analog Video Routing Switcher with Stereo Audio Follow Video

One
One

8 x 8 Routing Switching Systems

MODEL 860-XL818A

COMPOSITE VIDEO INPUT:

Number: 8
 Video Level: 1.0Vpp ±6dB
 Impedance: 75 Ω Looping
 Coupling: DC
 Connector: BNC
 Return Loss: 40 dB @ 3.58 or 4.43 MHz

AUDIO INPUT (OPTION):

Connector Type: Weco, 3-Pin Disconnect
 Impedance: 20K Ω
 Level: +26dBu, maximum
 CMRR: 60dB @ 1 KHz

COMPOSITE VIDEO OUTPUTS:

Number: 8
 Connector: BNC
 Level: Unity Gain, ±0.1 dB
 Character Video: 90 IRE Units
 Return Loss: 35 dB @ 3.58 or 4.43 MHz
 Character Background: 10 IRE Units
 Impedance: 75 Ω ±1%
 Vertical Interval Switching: Line 6, NTSC
 Frequency Response: ±0.1dB to 5MHz
 -3.0dB to 50MHz
 Differential Gain: 0.10%, 10% to 90% APL
 Differential Phase: 0.10°, 10% to 90% APL
 Crosstalk: 62dB to 5 MHz, worse case
 Propagation Delay: 5 nS, typical
 Hum and Noise: >60dB to 5 Hz
 DC Offset: <25mV
 Line Rate Tilt: <0.1%
 Field Rate Tilt: <0.1%
 SNR: -73dB

AUDIO OUTPUTS (OPTION):


Signal Type: Balanced
 Connector Type: Weco, 3-Pin Disconnect
 Impedance: >30 Ω
 Level: 26dBu, maximum
 Frequency Response: ±0.1dB to 20kHz, ref 1kHz
 Crosstalk: 90dB @ 10 KHz
 DC Offset: <50mV
 SNR: <100dB, 20Hz to 20KHz
 IM/THD: <0.02%

ENVIRONMENTAL:

Temperature: 0° to 50° C ambient
 Humidity: 10%/90% non-condensing
 Power: 9.5 VAR
 AC Voltage: 120/240 VAC ±10%, 50/60Hz

MECHANICAL:

Height: 1.75 inches
 Width: 19 inches
 Depth: 9.25 inches
 Weight: 9lbs

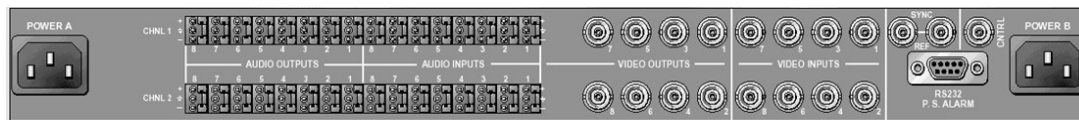

REAR PANEL